



# Samsung SCH-3500 Key Pad Replacement

It is possible to remove the keypad after disassembly of the battery, antenna, back cover, and logic board. Once these parts are removed, the keypad should simply slide out from its placement between the logic board and the front cover.

Written By: Brett Tomashitis





## TOOLS:

- [T6 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Battery



- Turn Samsung SCH3500 around so that the back is facing you. Depress locking tab on the back of the phone with a finger or thumb.

## Step 2



- Slide battery toward bottom of the phone, ~1/4 inch, to clear the hooks that keep it secured to the back of the phone.



## Step 3



- Lift battery away from phone case.
- The battery is now removed from the device. Congratulations.

## Step 4 — Antenna



- Grasp antenna firmly and rotate counterclockwise to unscrew it from the phone.

## Step 5



- When unscrewed, pull the antenna straight up and out.

## Step 6



- Pull guide tube free from its retaining ring and slide it out the top, like the antenna (optional).
- The antenna and its guide tube are now removed from the phone. Congratulations.



## Step 7 — Back Cover



- Remove the four screws using a T6 Torx screwdriver.


## Step 8



- Work from the bottom of the phone, separating the two halves of the case.

**i Note:** Take care to keep the logic board with the front case half. Part of the logic board is exposed to the sticker under the battery on the rear case half.




## Step 9

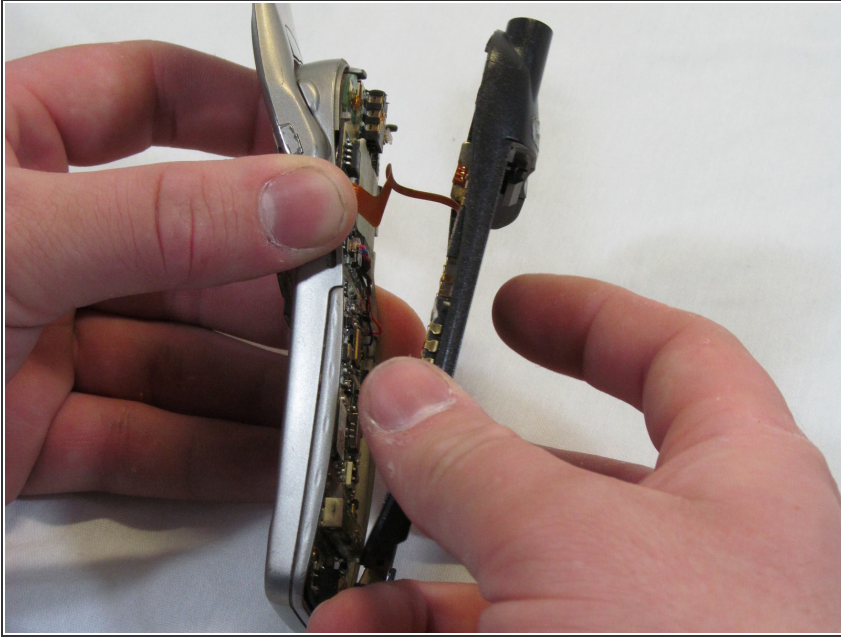

- Angle the rear case half away from the top of the front case half, pivoting the hooks out of their clasps.

**⚠ Caution:** Do not fully separate the halves. There is an antenna ribbon connected to the logic board from the back cover.


## Step 10

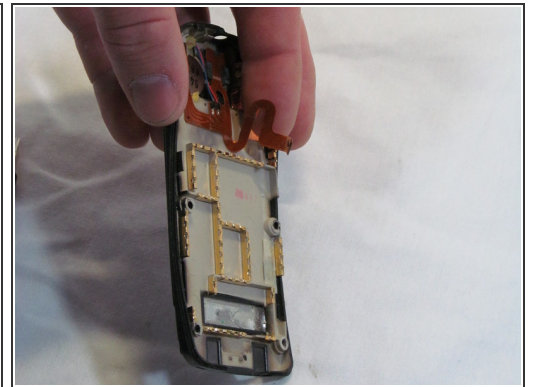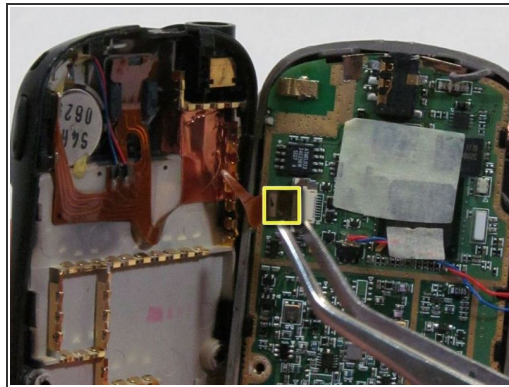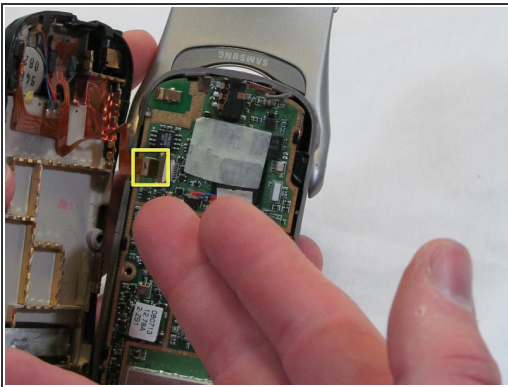

- Disconnect the antenna ribbon cable from the logic board at the Zero Insertion Force (ZIF) connector. The brown portion of the connector lifts up to release the cable end.
- The Back Cover is now removed. Congratulations.




## Step 11 — Logic Board

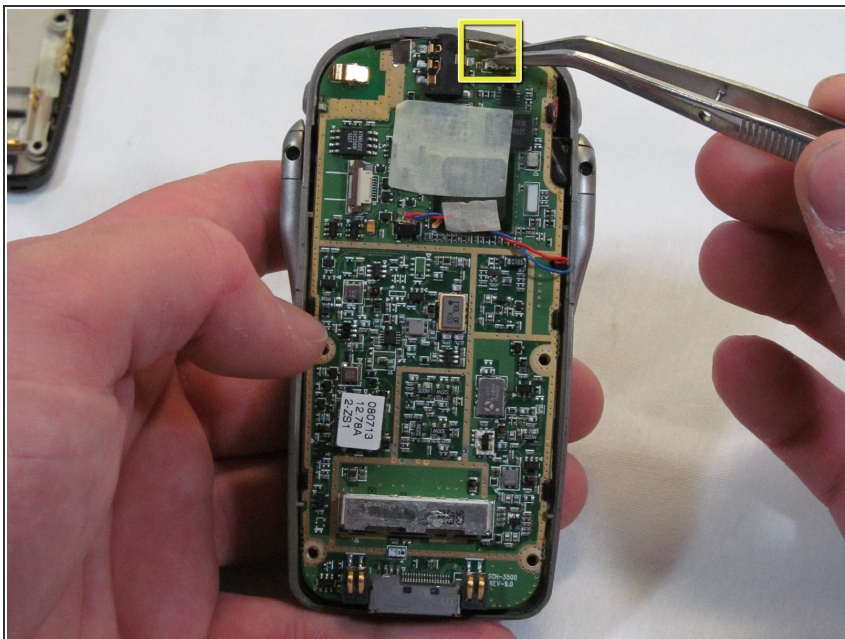

- Remove the connector for the earpiece speaker, located on the upper end of the logic board.

## Step 12

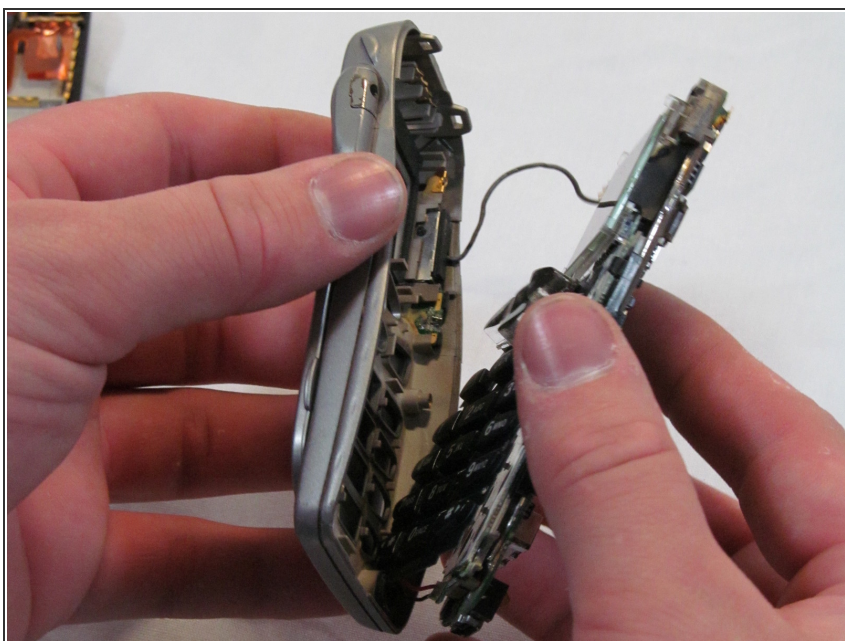

- Turn the front cover over, gently prying the logic board away from the front cover. It will remain attached by two wires from the front of the board.




## Step 13



- Work the microphone out of its socket on the front cover; it will remain attached to the logic board, its wires are soldered.
- The logic board is now removed from the phone. Congratulations.

## Step 14 — Key Pad

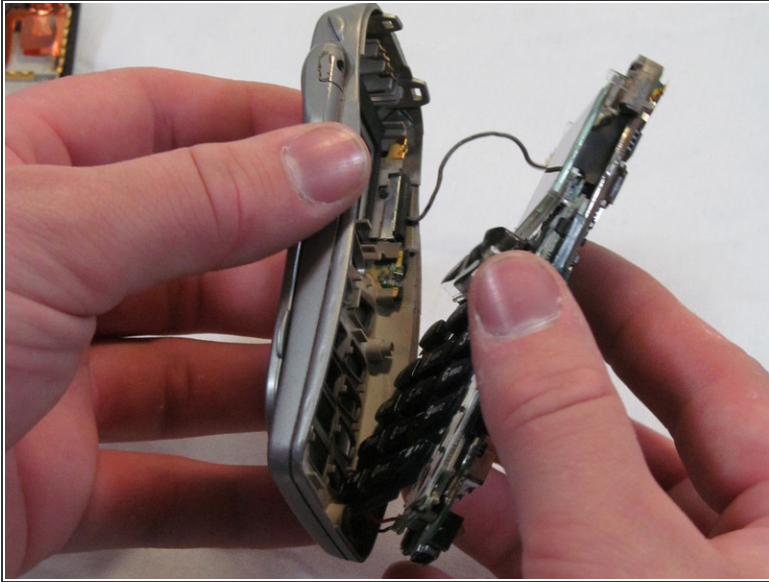

- Turn the front cover over and shake the keys out of it. They should come free in a single piece.
- ⓘ **Note:** The keypad may accidentally come free while removing rear cover or logic board. It is best to remove the logic board to reinstall the key mat.
- The key pad is now removed from the phone. Congratulations.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-24 02:45:42 AM.